





- TOP COAT 1 1/2 (1.50) GALLONS PER 100 SQUARE FEET
- INTERMEDIATE COAT 1 1/2 (1.50) GALLONS PER 100 SQUARE FEET
- LABOR SAV 'R EXTEND 2" MINIMUM ONTO ROOF SURFACE EACH IN EACH DIRECTION
- EPDM PRIMER 3/4 (0.75) GALLONS PER 100 SQUARE FEET
- EXISTING EPDM ROOF SURFACE

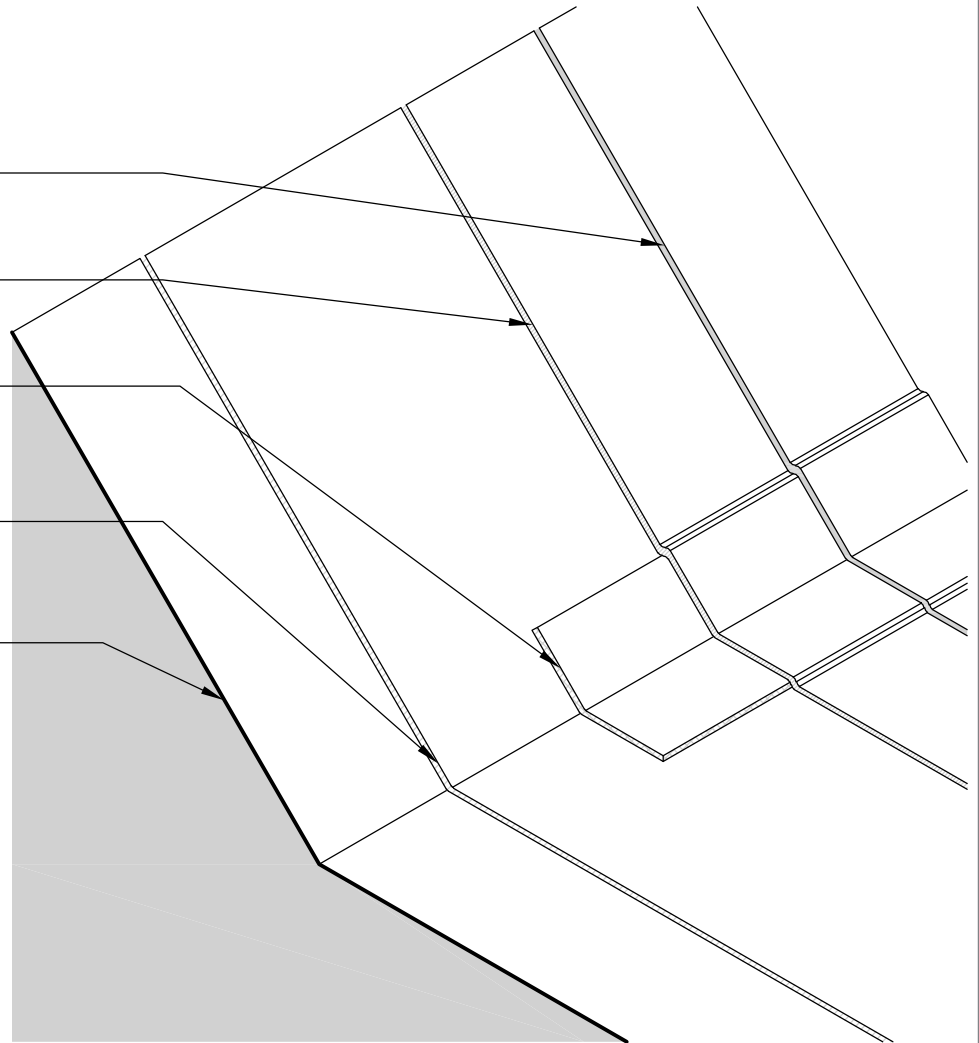

 **ELASTIKOTE** REPEL REFLECT RENEW™

CORPORATE HEADQUARTERS
5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

ELASTIKOTE APPLICATION AT
TRANSITION TO SLOPED ROOF
Detail for Application on Existing
EPDM Roofing Systems

DWG NO.
EK E011