




WEAR COAT - 1.5 GALLONS
PER 100 SQUARE FEET

BASE COAT - 1.5 GALLONS
PER 100 SQUARE FEET

LABOR SAV'R - MUST CATCH
GRAVEL STOP EDGE AND
ONTO ROOF SURFACE 2"

EXISTING SUBSTRATE @
GRAVEL STOP

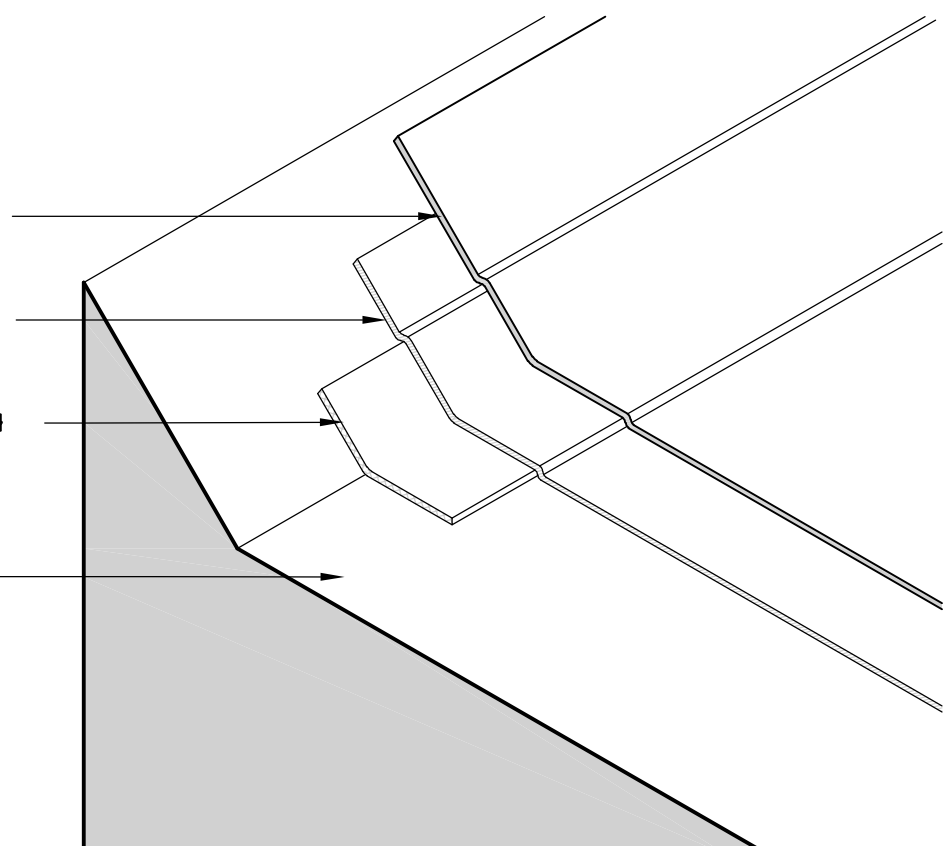

CORPORATE HEADQUARTERS

5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

ELASTIKOTE APPLICATION AT GRAVEL STOP

Detail for Application on Existing
Substrate at Building Edge

DWG NO.

EK A002