




- TOP COAT - 1 ½ (1.50)
GALLONS PER 100
SQUARE FEET
- BASE COAT - 1 ½ (1.50)
GALLONS PER 100
SQUARE FEET
- SPRAYABLE MASTIC
ENCAPSULATING
LABOR SAV'R, 1" MIN.
OVERLAP ALL SIDES
- LABOR SAV'R EXTEND
2" MINIMUM ONTO ROOF
SURFACE EACH IN EACH
DIRECTION
- EXISTING PLYWOOD ROOF
SURFACE

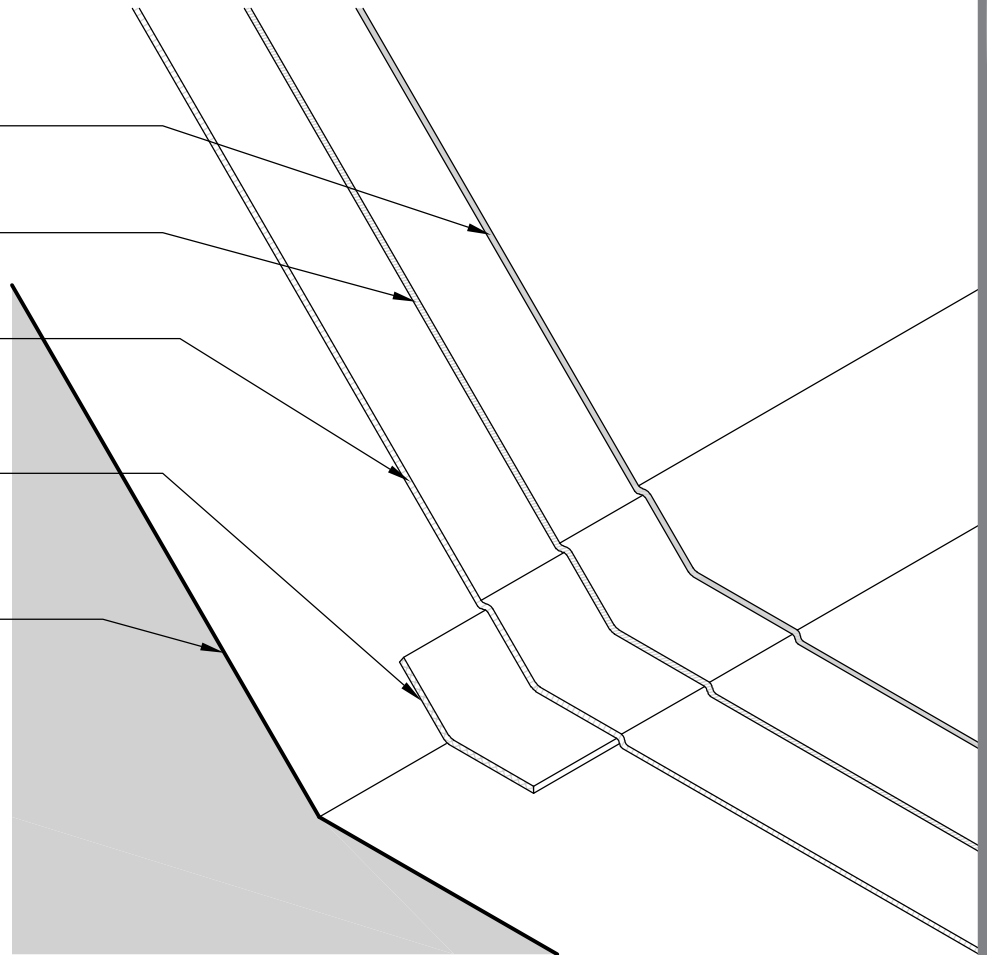

CORPORATE HEADQUARTERS
5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

ELASTIKOTE APPLICATION AT
TRANSITION TO SLOPE ROOF
Detail for Application on Existing
Plywood Roofing Systems

DWG NO.
EK P010