




TOP COAT - 1 1/2 (1.50)
GALLONS PER 100
SQUARE FEET

BASE COAT - 1 1/2 (1.50)
GALLONS PER 100
SQUARE FEET

SPRAYABLE MASTIC
ENCAPSULATING
LABOR SAV'R, 1" MIN.
OVERLAP ALL SIDES

LABOR SAV'R EXTEND
2" MINIMUM ONTO ROOF
SURFACE EACH IN EACH
DIRECTION

EXISTING 100 PSI POLY-ISO
ROOF SURFACE

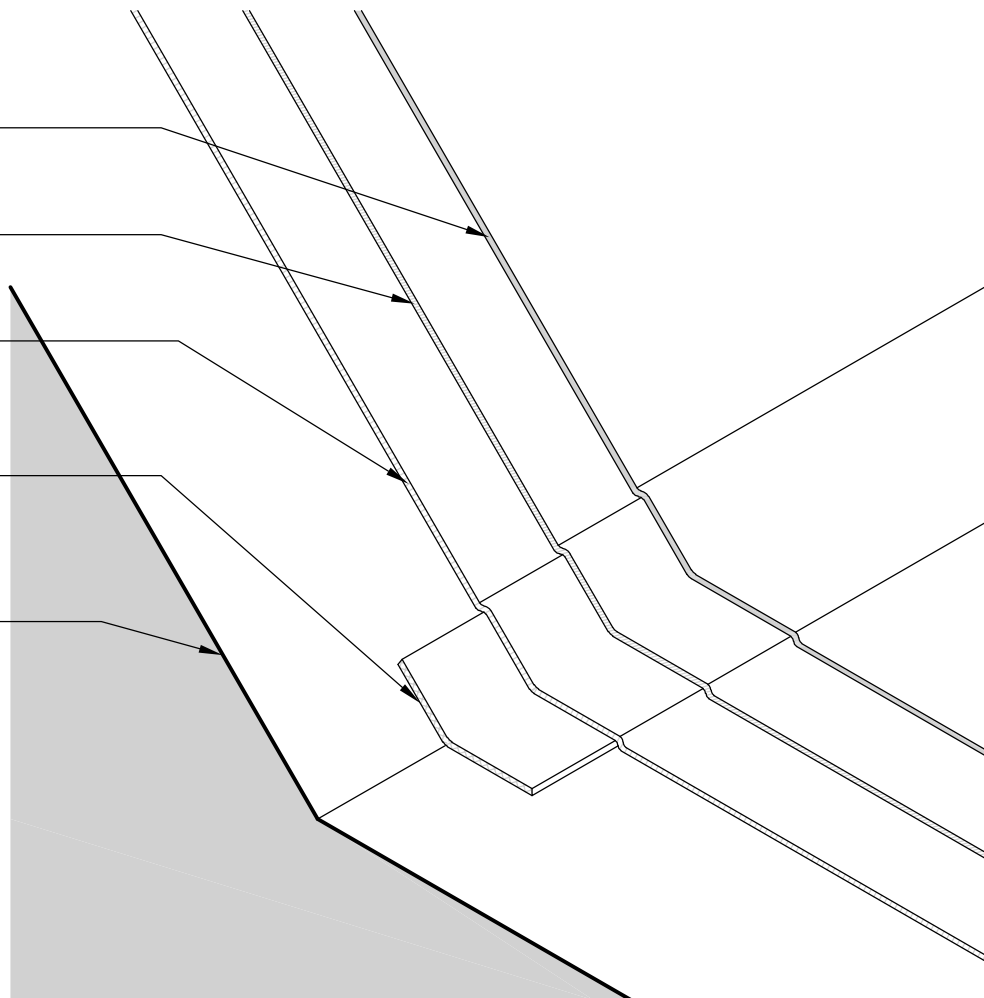

CORPORATE HEADQUARTERS

5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

ELASTIKOTE APPLICATION AT
TRANSITION TO SLOPED ROOF
Detail for Application on Existing
100 PSI Poly-Iso Roofing Systems

DWG NO.

EK PI011