




TOP COAT - 1 1/2 (1.50)
GALLONS PER 100
SQUARE FEET

BASE COAT - 1 1/2 (1.50)
GALLONS PER 100
SQUARE FEET

LABOR SAY 'R' EXTEND
2" MINIMUM ONTO ROOF
SURFACE EACH IN EACH
DIRECTION

EXISTING SINGLE PLY
ROOF SURFACE

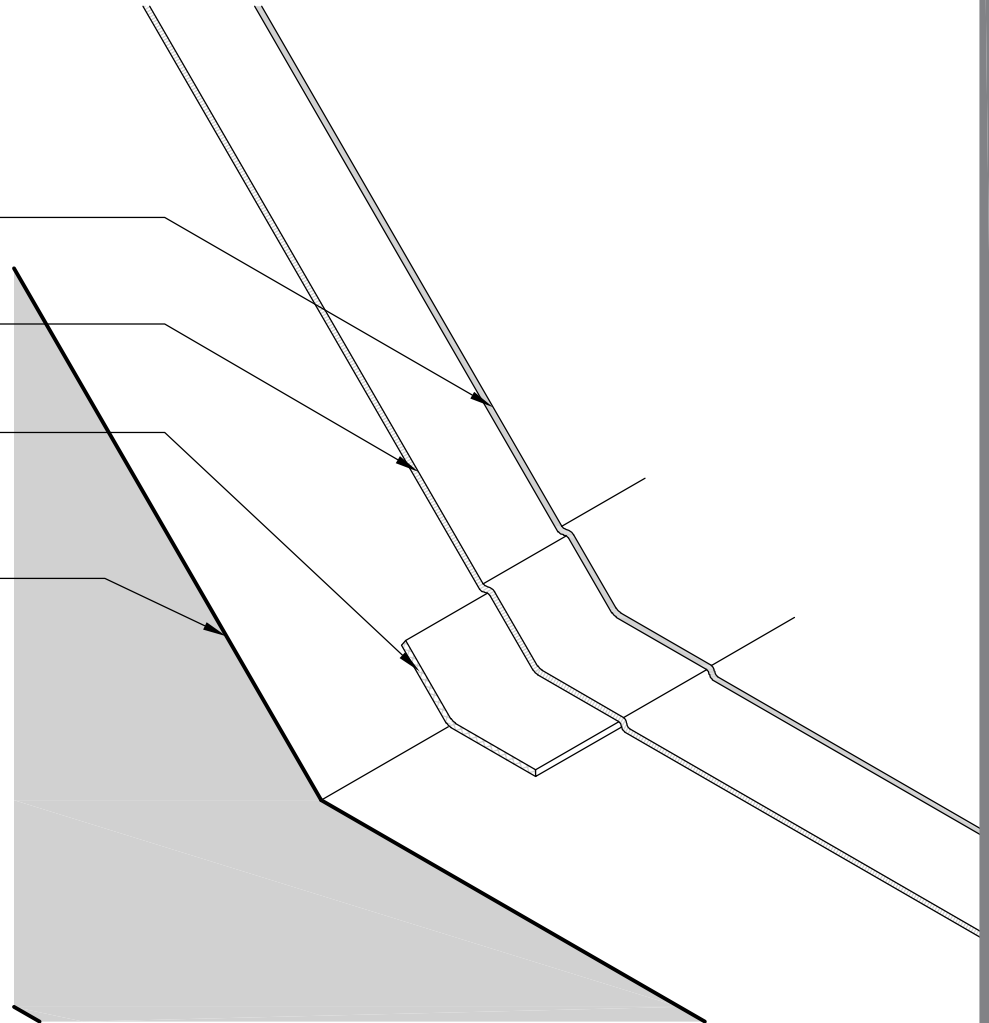

TPO, PVC, Hypalon, Kee, and Fibertite Membrane Systems



CORPORATE HEADQUARTERS

5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

ELASTIKOTE APPLICATION AT
TRANSITION TO SLOPED ROOF
Detail for Application on Existing
Single Ply Roofing Systems

DWG NO.

EK SP010