

## Description:

### **HYLOAD S/A W/ DRIP (SELF/ADHERED) MEMBRANE W/ Synthetic Butyl**

The Hyload S/A Membrane is a composite membrane. The top layer is a 25-30 mil polymeric, reinforced membrane incorporating DuPont's Elvaloy® KEE polymer. The bottom layer is 10 to 15 mils of high performance synthetic butyl adhesive. At one edge of the SA with Drip Edge Membrane, the butyl adhesive is held back 1-1/2". The butyl adhesive layer is covered with a release paper, which is discarded after installation.



## Product Highlights:

- Recommended to adhere all Hyload membrane systems
- No primer required
- Not effected by high alkaline environments typical of masonry construction
- Hyload Systems will not deteriorate or harden with longevity or ultra violet ray exposure
- Hyload's Technical Service Department offers specialized advice through a highly experienced technical staff to aid the construction process.
- Hyload provides architectural design service, contractor training and job site assistance
- Lifetime Building Warranty available when total Hyload flashing system is used.
- ***For specifics consult the Hyload Technical Department.***

## Applications:

- Through-Wall Masonry Flashing
- Door Jam Flashing
- Window Jam Flashing
- In conjunction with Hyload Pre-Formed Shapes
- Building Envelope Flashing

## Packaging:

- Standard Widths:
- 12", 18", 24", and 36"
- Special widths available upon request.


## Substrates:

- ALL Hyload Membranes.
- Wood
- Metal
- Concrete, Block, and Masonry
- Stainless Steel



**Colors:**

- Black, Gray, Tan, and White

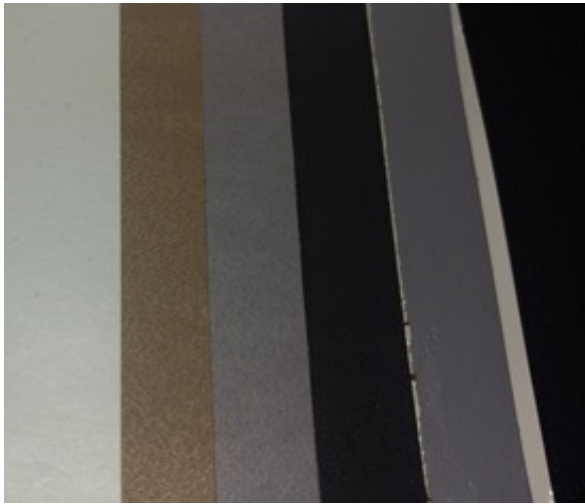

**Limitations:**

- Hyload S/A with Drip Edge Membrane should not be applied to moist or damp surfaces
- Hyload S/A with Drip Edge Membrane should only be applied when both air and surface temperatures are 20°F and rising.
- Hyload S/A with Drip Edge Membrane cannot be used with coal tar mastic or polysulfide sealant.

**Performance and Physical Properties:**

Property	Test Method	Results
Elongation	ASTM D412	225%
Tensile Strength	ASTM D412	875 psi min
Tear Strength	ASTM D624	270 ppi
Low Temperature Flexibility	ASTM D146	-12°
Water Absorption	ASTM D471	<0.1%



**Warranty:**

Hyload makes available to its customers several high performance product warranties. Contact Hyload's Corporate Office directly for details. A standard warranty is 10 years.