




HYLOAD[®]
Keeping the elements out.[®]

TOP COAT - 1 ½ (1.50)
GALLONS PER 100
SQUARE FEET

BASE COAT - 1 ½ (1.50)
GALLONS PER 100
SQUARE FEET

LABOR SAV'R EXTEND
2" MINIMUM ONTO ROOF
SURFACE EACH IN EACH
DIRECTION

EXISTING CONCRETE ROOF
SURFACE

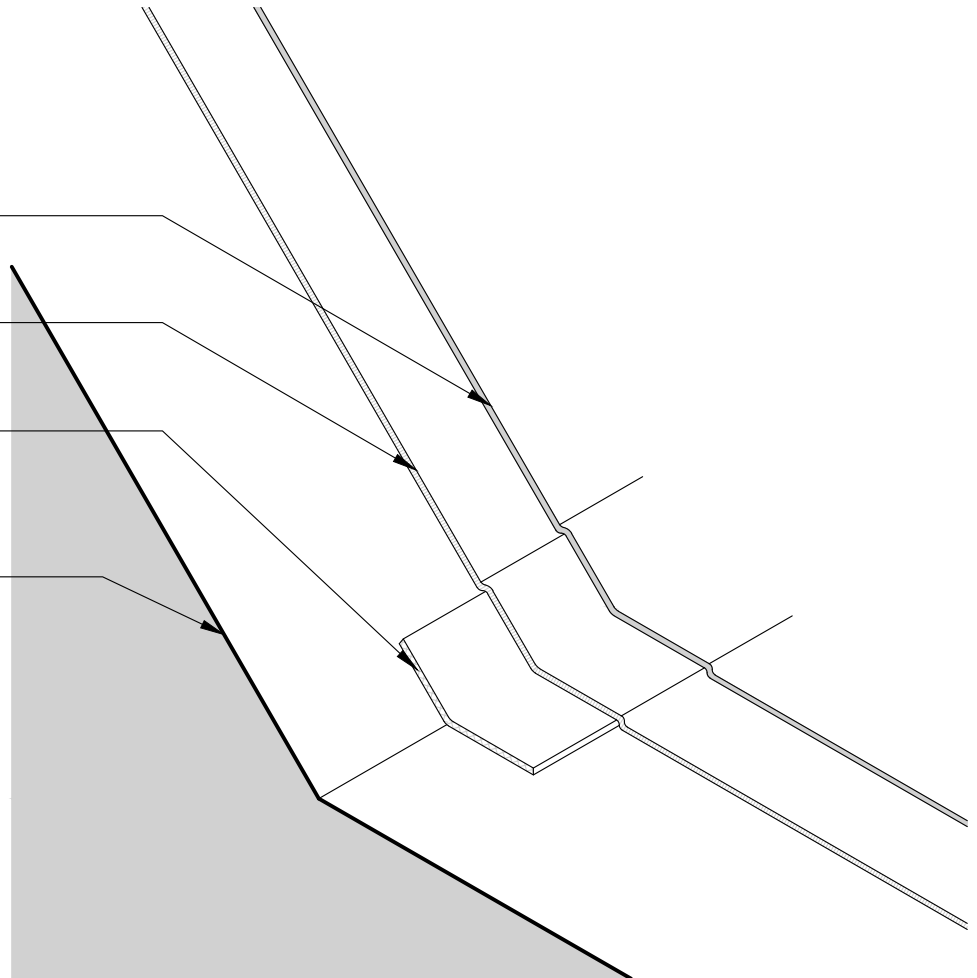

HyKOTE[™]
Elastomeric Roofing & Waterproofing

CORPORATE HEADQUARTERS

5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

**HYKOTE APPLICATION AT
TRANSITION TO SLOPED ROOF**
Detail for Application on Existing
Concrete Roofing Systems

DWG NO.

HK C009

WWW.HYLOAD.COM