


TOP COAT 1½ (1.50)
GALLONS PER 100
SQUARE FEET

INTERMEDIATE COAT 1½
(1.50) GALLONS PER 100
SQUARE FEET

LABOR SAV 'R EXTEND
2" MINIMUM ONTO ROOF
SURFACE EACH IN EACH
DIRECTION

EPDM PRIMER ¾ (0.75)
GALLONS PER 100
SQUARE FEET

EXISTING EPDM ROOF
SURFACE

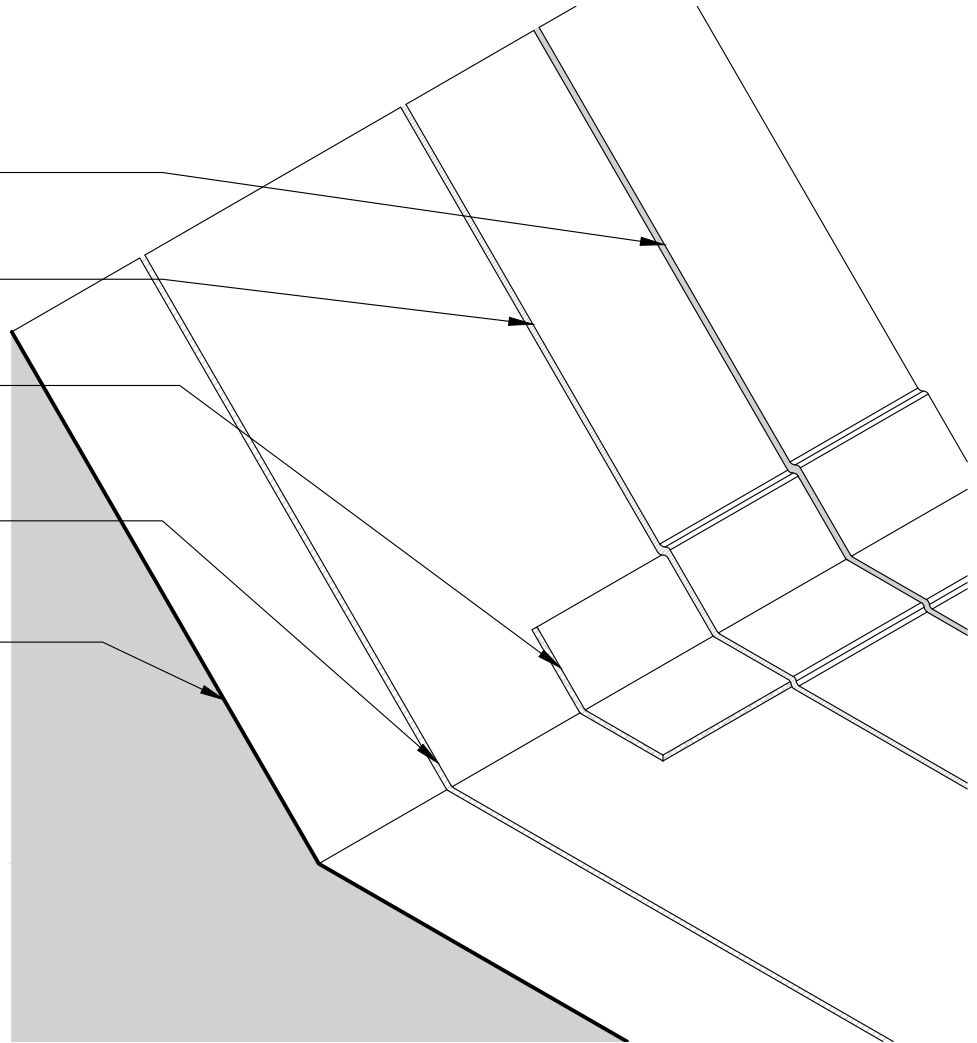

HyKOTE[™]
Elastomeric Roofing & Waterproofing

CORPORATE HEADQUARTERS

5020 ENTERPRISE PARKWAY
SEVILLE, OHIO 44273
PHONE: (800) 457-4056
FAX: (330) 769-4153

HYKOTE APPLICATION AT
TRANSITION TO SLOPED ROOF
Detail for Application on Existing
EPDM Roofing Systems

DWG NO.

HK E011